



Technical data sheet



Descriptions	Name	403 Factor			
	Line	Design			
	Description	Swinging door at 180° with fixed profile			
	Mounting possibilities	Can be placed between 2 walls Can be combined in corner setup with 410			
	Turning direction	90° outwards and 90° inwards			
Measurements	Article	Width/ NIS width	Height	entry	Left/Right
	Stock transparent + Aquaclean				
	403 001 000 ### 101 109	800 mm / 750-790 mm	2000 mm	495mm	Left/Right
	403 002 000 ### 101 109	900 mm / 850-890 mm	2000 mm	545mm	Left/Right
	403 003 000 ### 101 109	1000 mm / 950-990 mm	2000 mm	645mm	Left/Right
	403 004 000 ### 101 109	1200 mm / 1150-1190 mm	2000 mm	645mm	Left/Right
	403 005 000 ### 101 109	1400 mm / 1350-1390 mm	2000 mm	645mm	Left/Right
	403 006 000 ### 101 109	1600 mm / 1550-1590 mm	2000 mm	745mm	Left/Right
	Different glass type				
	403 001 001 ###	800 mm / 750-790 mm	2000 mm	495mm	Left/Right
	403 002 001 ###	900 mm / 850-890 mm	2000 mm	545mm	Left/Right
	403 003 001 ###	1000 mm / 950-990 mm	2000 mm	645mm	Left/Right
	403 004 001 ###	1200 mm / 1150-1190 mm	2000 mm	645mm	Left/Right
	403 005 001 ###	1400 mm / 1350-1390 mm	2000 mm	645mm	Left/Right
403 006 001 ###	1600 mm / 1550-1590 mm	2000 mm	745mm	Left/Right	
* Custom made *	Width	Height		Left/Right	
403 009 001 ###	600-1650 mm	2000 mm	/	Left/Right	
	Made to measure	Made to measure per mm, max. width 1650 mm, height 2000 mm			
	Glass beveling	Not possible			
Glass	Glass specifications	6 mm toughened safety glass (norm NBN 23-002, klasse NBN EN 12600)			
	Type of glass	101 Transparent	105 Bronze	114 Crepi	
		102 Opal mat	106 Gris	119 Opal white	
	Glass treatment	104 Extra transparent	107 Green		
	Reversible	109 Aquaclean			This door is reversible
Finishing	Characteristics	Wall Profile, Hinge profile with lift function and stop profile with seals			
	Finishings	Shiny (011), Black matte (099), White matte (088)			
	Stabilisation bar	Not possible			
Service	Measuring	Possible with price supplement			
	Mounting	Possible with price supplement			
	Mounting instructions	Available			
Technische details	Advice	Adjustability 40mm (-20 mm / +20 mm)			
		A profile or glass must always be placed on the tiling. Otherwise, this can lead to issues with waterproofing.			
		When preparing, take into account the size and weight of the glass. Can the glass be brought into and installed in the bathroom.			

403 Factor

Handle

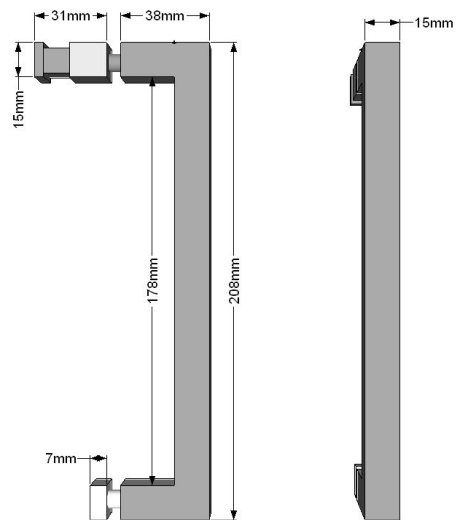

Hinge profile

