


Technical data sheet

Description	Name Line	104 Inox Concept Personal		
	Description	Swinging door at 180° with 1 fixed panel		
	Mounting possibilities	Can be mounted between 2 walls Can be combined with 110/111		
	Turning direction	90° outwards and 90° inwards		
Measurements	Article	Width	Height	Left/Right
	104 001 001 ###	up to 800 mm	up to 2000 mm	Links
	104 002 001 ###	801 mm-900 mm	up to 2000 mm	Links
	104 003 001 ###	901 mm-1000 mm	up to 2000 mm	Links
	104 004 001 ###	1001 mm-1200 mm	up to 2000 mm	Links
	104 005 001 ###	1201 mm-1400 mm	up to 2000 mm	Links
	104 006 001 ###	1401 mm-1600 mm	up to 2000 mm	Links
	104 007 001 ###	1601 mm-1800 mm	up to 2000 mm	Links
	104 008 001 ###	1801 mm-2000 mm	up to 2000 mm	Links
	104 001 002 ###	up to 800 mm	up to 2000 mm	Rechts
	104 002 002 ###	801 mm-900 mm	up to 2000 mm	Rechts
	104 003 002 ###	901 mm-1000 mm	up to 2000 mm	Rechts
	104 004 002 ###	1001 mm-1200 mm	up to 2000 mm	Rechts
	104 005 002 ###	1201 mm-1400 mm	up to 2000 mm	Rechts
	104 006 002 ###	1401 mm-1600 mm	up to 2000 mm	Rechts
	104 007 002 ###	1601 mm-1800 mm	up to 2000 mm	Rechts
	104 008 002 ###	1801 mm-2000 mm	up to 2000 mm	Rechts
Made to measure Découpes	Possible per mm, width up to 2000mm. Height can be modified included			
Glass	Glass specifications Type of glass	8mm toughend safety glass (norm NBN 23-002, classe NBN EN 12600)		
	Glass treatments	101 Transparent 130 Timeless 102 Opal mat 104 Extra transparent 105 Bronze 106 Gris 109 Aquaclean 112 Print	107 Green 108 Blue 114 Crepi 115 Cathedral 118 Black 119 Opal white 110 Zone intime	120 Opal Black 125 Opal bronze 126 Opal gris 121 Mirror 111 Zone à la carte
Finishings	Characteristics Finishing ###	2 wall mounts, 2 hinges, doorknob Shiny (011), Matte (001), Black Matte (099), White Matte (088), Optic Nickel Brushed (021), Optic Nickel Polished (022), Optic Gold Brushed (031), Optic Gold Polished (033), Optic Rosé Gold Brushed (041), Optic Rosé Gold Polished (044), Optic Bronze Brushed (051)		
	Stabilizing bar	Other colors on demand Stabilizing bar 45° (500mm)		
Service	Checking of measurements	Included in the price		
	Mounting Mounting guidelines	Possible at an additional cost Available		
Sealing strips	Characteristics	Bottom seal, intermediate seal and closing seal UV-resistant according Xenon test 1200 with cycles 120/18 Transparent according to RAU-PVC1107 Anti mould according to DIN5373		
	Advice	Non-adjustability A profile or glass must always be placed on the tiling. Otherwise, this can lead to issues with waterproofing. When preparing, take into account the size and weight of the glass.		



Can the glass be brought into and installed in the bathroom.

Aquaconcept
Schaarbeekstraat 34
9120 Melsele (Beveren)
België



Tel. : +32 (0)3 296 03 03


E-mail : info@aquaconcept.eu

www.aquaconcept.eu


Technical specifications

104 Inox Concept


Hinges

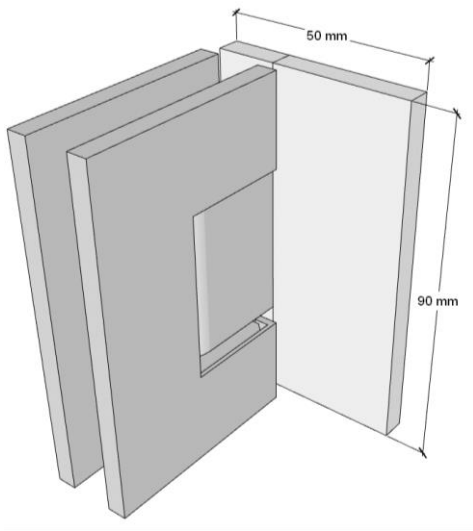

Wall mounting

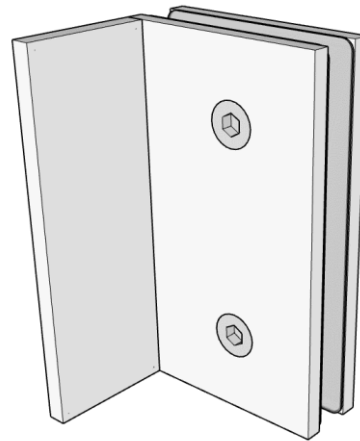

Doorknob



Stabilization bar.



Aquaconcept
Schaarbeekstraat 34
9120 Melsele (Beveren)
België



Tel.: +32 (0)3 296 03 03

E-mail: info@aquaconcept.eu

www.aquaconcept.eu