

## Technical data sheet




Omschrijving	<b>Name</b>	<b>341 Slide Easy</b>				
	<b>Line</b>	Design				
	<b>Description</b>	2-part sliding door				
	<b>Mounting possibilities</b>	Can be fixed between 2 walls Can be combined with 360				
Measurements	<b>Article</b>	<b>Width</b>	<b>Height</b>	<b>Length fixed panel</b>	<b>Left/Right</b>	
		<b>Stock transparent glas</b>				
		341 402 000 ###	1200 mm	2044 mm	600 mm	Left/Right
		341 403 000 ###	1400 mm	2044 mm	700 mm	Left/Right
		341 404 000 ###	1600 mm	2044 mm	850 mm	Left/Right
		341 405 000 ###	1800 mm	2044 mm	1050 mm	Left/Right
		341 406 000 ###	2000 mm	2044 mm	1250 mm	Left/Right
		<b>Different types of glass</b>				
		341 502 000 ###	1200 mm	2044 mm	600 mm	Left/Right
		341 503 000 ###	1400 mm	2044 mm	700 mm	Left/Right
		341 504 000 ###	1600 mm	2044 mm	850 mm	Left/Right
		341 505 000 ###	1800 mm	2044 mm	1050 mm	Left/Right
	341 506 000 ###	2000 mm	2044 mm	1250 mm	Left/Right	
	<b>Custom made</b>					
	341 509 000 ###	950mm-2500 mm	up to 2044 mm		Left/Right	
	<b>Customisation</b>	Standard height 2044mm. Hoger mits meerprijs Door width max 800mm				
	<b>Chamfers</b>	Not possible				
Glass	<b>Type of glass</b>	8 mm toughened safety glass (norm NBN 23-002, klasse NBN EN 12600)				
	<b>Kinds of glass</b>	101 Transparant	107 Green	119 Opal white		
		102 Opal mat	108 Blue	120 Opal Black		
		104 Extra transparant	114 Crepi	125 Opal bronze		
		105 Bronze	115 Cathedral	126 Opal gris		
		106 Gris	118 Black	121 Mirror		
	<b>Glass treatments</b>	109 Aquaclean	110 Zone intime	111 Zone à la carte		
Finishing	<b>Characteristics</b>	Rail with integrated Soft Open and Close systeem at the top of the glass Click-out system at the bottom for easy maintenance Wall profiel fixed glass panel				
	<b>Finishings</b>	Shiny (011), Matte (001), Black matte (099), White matte (099)				
Service	<b>Measuring</b>	Possible with price supplement				
	<b>Mounting</b>	Possible with price supplement				
	<b>Mounting instructions</b>	Available				
Seals	<b>Characteristics</b>	UV-resistant according to Xenon test 1200 with cycle 120/18 Crystal-clear color according to RAU-PVC1107 Mold resistance according to DIN 5373				
	<b>Advice</b>	A profile or glass must always be placed on the tiling. Otherwise, this can lead to issues with waterproofing. When preparing, take into account the size and weight of the glass. Can the glass be brought into and installed in the bathroom.				


Technical data sheet parts

**341 Slide Easy**


**Rail**

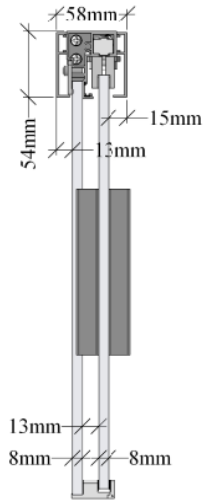



**Wall profile**

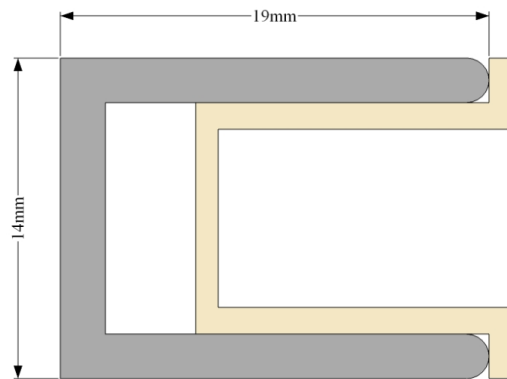



**Adhesive handle**



Top view with glass  
Nisbreedte / Largeur du niche 1200mm

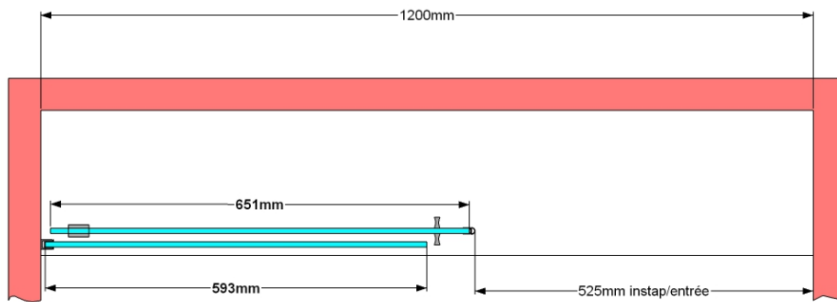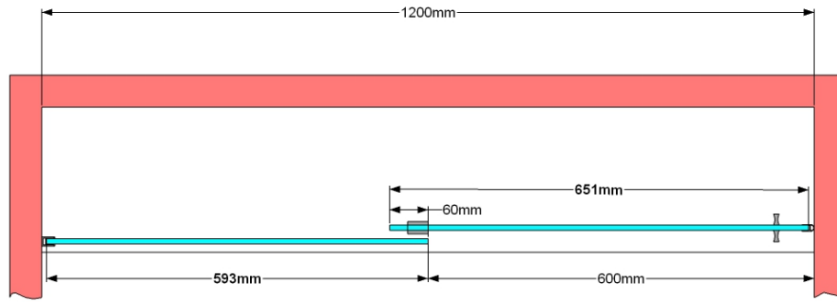

Nisbreedte / Largeur du niche 1400mm

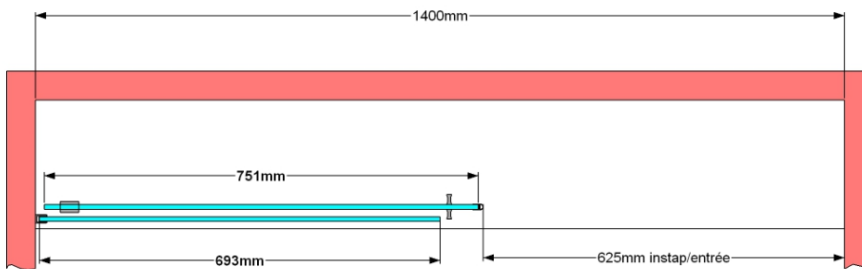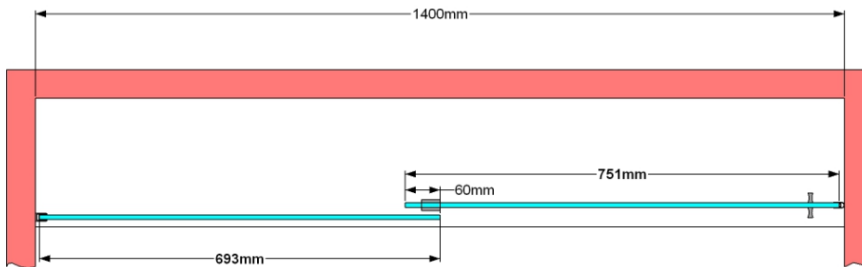

Aquaconcept  
Schaarbeekstraat 34  
9120 Melsele (Beveren)  
België




Tel.: +32 (0)3 296 03 03  
Fax: +32 (0)3 296 03 02  
E-mail: [info@aquaconcept.eu](mailto:info@aquaconcept.eu)  
[www.aquaconcept.eu](http://www.aquaconcept.eu)

Aquaconcept  
Schaarbeekstraat 34  
9120 Melsele (Beveren)  
België




Tel.: +32 (0)3 296 03 03  
Fax: +32 (0)3 296 03 02  
E-mail: [info@aquaconcept.eu](mailto:info@aquaconcept.eu)  
[www.aquaconcept.eu](http://www.aquaconcept.eu)

### Nice width 1600mm

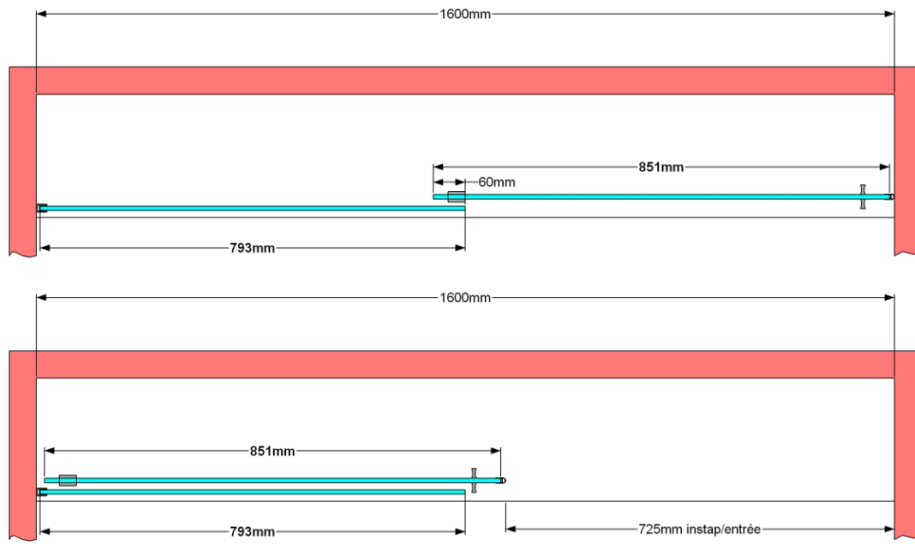

### Nice width 1800mm

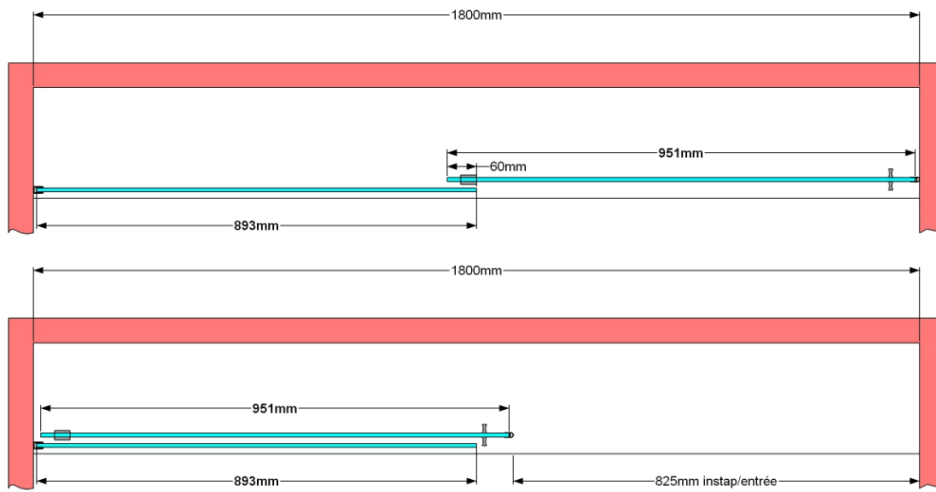

### Nis width 2000mm

