

Technical data sheet




Descriptions	Name	401 Factor				
	Line	Design				
	Description	Swinging door at 180° in NIS setup				
	Mounting possibilities	Can be placed between 2 walls Can be combined in corner setup with 410				
	Turning direction	90° outwards and 90° inwards				
Measurements	Article	Width/ NIS width	Height	entry	Left/Right	
	Stock transparent + Aquaclean					
		401 001 000 ### 101 109	700 mm / 650-690 mm	2000 mm	545 mm	Left/Right
		401 002 000 ### 101 109	800 mm / 750-790 mm	2000 mm	645 mm	Left/Right
		401 003 000 ### 101 109	900 mm / 850-890 mm	2000 mm	745 mm	Left/Right
		401 004 000 ### 101 109	1000 mm / 950-990 mm	2000 mm	845 mm	Left/Right
	Different glass type					
		401 001 001 ###	700 mm / 650-690 mm	2000 mm	545 mm	Left/Right
		401 002 001 ###	800 mm / 750-790 mm	2000 mm	645 mm	Left/Right
		401 003 001 ###	900 mm / 850-890 mm	2000 mm	745 mm	Left/Right
		401 004 001 ###	1000 mm / 950-990 mm	2000 mm	845 mm	Left/Right
	* Custom made *		Width	Height		Left/Right
		401 009 001 ###	350-1050 mm	2000 mm	/	Left/Right
	Made to measure	Made to measure per mm, max. width 1050 mm, height 2000 mm				
	Glass beveling	Not possible				
Glass	Glass specifications	6 mm toughened safety glass (norm NBN 23-002, klasse NBN EN 12600)				
	Type of glass	101 Transparent	105 Bronze	114 Crepi		
		102 Opal mat	106 Gris	119 Opal white		
	Glass treatment	104 Extra transparent	107 Green			
	Reversible	109 Aquaclean This door is reversible				
Finishing	Characteristics	1 Hinge profile with lift profile + stop profile with seal				
	Finishings	Shiny (011), Black matte (099), White matte (088)				
	Stabilisation bar	Not possible				
Service	Measuring	Possible with price supplement				
	Mounting	Possible with price supplement				
	Mounting instructions	Available				
Technische details	Advice	Adjustability 40mm (-20 mm / +20 mm)				
		A profile or glass must always be placed on the tiling. Otherwise, this can lead to issues with waterproofing.				
		When preparing, take into account the size and weight of the glass. Can the glass be brought into and installed in the bathroom.				

Technical data sheet parts

401 Factor

Handle

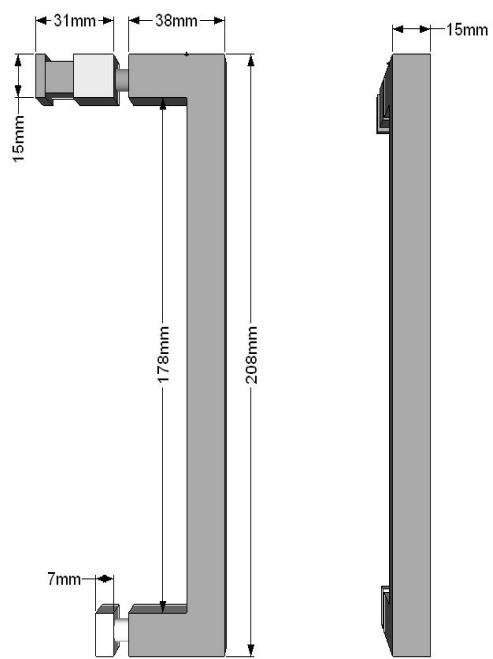

Hinge profile

